G URU UPVC

Door Window Company





GURUUPVC Door Window Company





INTERDUCTION

GURUUPVC has been a marketleader in offering a wide range of products and complete solutions catering to individual demands of the construction & Building industry. Having an experience of over a decade in the Indianmarket. GURUUPVC has been setting standards inquality. Service and technology up gradation.

Based in HANUMANGARH, the company houses a team of highly skilled and efficient personnel who are dedicated to meet customer specific needs. Since its conception in year 2015 GURUUPVC has grown in strength and has become an organization active throughout India,

with recent inroads beingmade into neighboring countries. With a well-established sales & distribution network spread throughout all major cities in India, backed up with technical & sales support in each region, It aim to have an effective supply chain to become more responsive to customer needs and responding efficiently to changes in market demands

Product excellent is not the end of GURUUPVC window & door system, with international quality and vested interestin

ensuring its products are not only well designed butal so successfully installed 20lakhs sft of GURUUPVC with dedicated fabricators.

Upvc profiles have special additives high strength, dimensional, stability & weather stability


to make the material both tough&durable.It does not fade or discolored & therefore an excellent investment in your home

GURUUPVC windows&Doors are made as per customer's requirement.

Our windows &doors can be made in various designs.

These are casement windows, Slidingwindows, Combination window, Bay windows, Tilt&Turn, French Doors&windows, Balcony Doors, Lift&Slide Doors, Tilt&Slide window&doors, and Sliding Folding Doors etc.



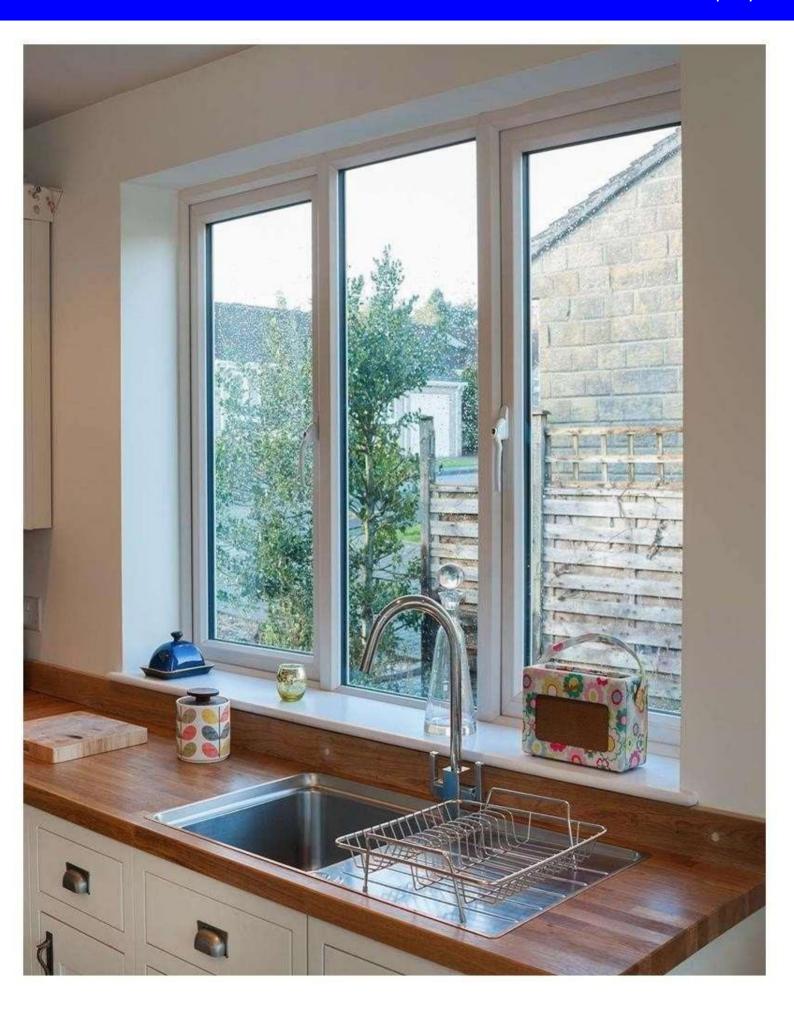

UPVC WINDOWS FEATURES



LONG-LASTING STRENGTH

Most uPVC tends to change its color and property due to sustained exposure to UV radiation. The engineered blend used in GURUUPVC is UV stabilized that gives it a long life.



HEALTHIER INDOOR AIR QUALITY

The usage of high quality woolpile a long with dual layer sealing system in GURUPVC windows prevents dust and pollution from entering your home. This ensures the air inside your home is cleaner and healthier.



LEAD-FREE

GURUUPVC windows are lead-free in line with the global trend to eliminate the use of lead in the construction industry. So, you can be sure about the health of your family.



ENERGY-EFFICIENT

The multi-chambered design of GURUUPVC profiles prevents the transfer of heat inside your house. This makes your house energy efficient by reducing your air-conditioning cost significantly



SAFE &SECURE

Every GURUUPVC window is reinforced by a concealed GI section which is designed basedon the wind pressure of that region, providing additional strength and stability. Making your home safe and secure.



WEATHER PROOF


Every GURUUPVC window is reinforced by a concealed GI section which is designed based on the wind pressure of that region, providing additional strength and stability. Making your home safe and secure.







GURU UPVC Door Window Company

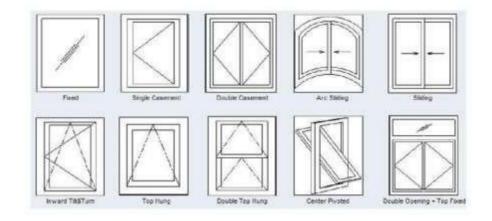




	CASEMENT DIAMOND SERIES -60MM							
SL.NON	AME &DETAILS	CODENO	SECTIONALVIEW	REINFORCE	MENTWEIGH M	IT/PACK ETERQT	LENGTH Y(MTRS)	
1	60 Frame A	60РКА	* 46 46 47 40 40 40 40 40	27.5	0.926	6	5.9	
2	60.Out-swing window sash 2	60WKCS2	** 60 25×34×14 46 47 48	75	1.21	6	5.9	
3	60.Out-swing door sash 2	60WKMS2	** 108 60 68 68	47. Su	1.650	4	5.9	
4	60 Mullion A	60ZTA	** 72 14 35×17 46 36 →	35	0.987	6	5.9	
5	150 Door panel 2	150MB2			0.884	10	5.9	

6	60 Single glazing bead A	60DYA	35	0.317	20	5.9
7	60 Bay corner	60ZJ2	60.2	0.71	4	5.9
8	Round Bead	PT	17	0.092	50	5.9
9	60 In swing door sash 3	60NKMS3	78	1.217	4	3.0

60 in-swing casement window technical drawing

60 out-swing casement window technical drawing

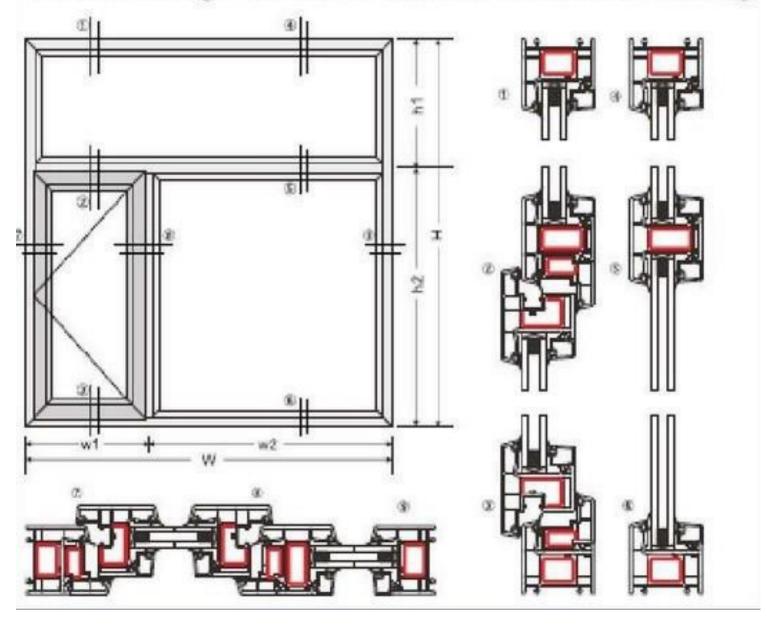







SLIDINGSYSTEM-60-88-112							
SL.NON	AME &DETAILS	CODENO	SECTIONALVIEW	REINFORCEM	ENTWEIGH MI	/PACK TERQT	LENGTH Y(MTRS)
1	60 Double sliding frame A	60LGKA	62 55 33×18	33	1,098	6	5.9
2	42 Interlock	42GM	43.5		1.842	20	5.9
3	112 Sliding frame B	112KB	12 12 12 12 12 130×16 130×16 112	30	1.700	4	5.9
4	60 Sliding Door	60TLMS1	92 42 34×29 35.5	34	1.04	4	5.9

	SLIDINGSYSTEM-60-88-112								
SL.NON	AME &DETAILS	CODENO	SECTIONALVIEW	REINFORCEM	ENTWEIGH M	T/PACK TERQT	LENGTH Y(MTRS)		
7	60 Sliding door sash cover	60TLMSFG	44 6.5		0.217	20	5.9		
8	60 Double glazing bead A	60SYA	24.5		0.22	20	5.9		



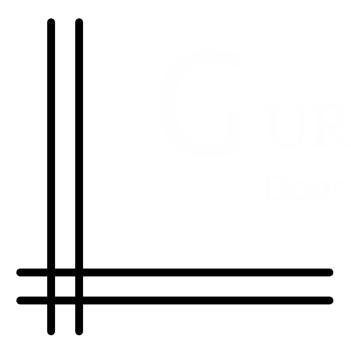

88 sliding split type window technical drawing

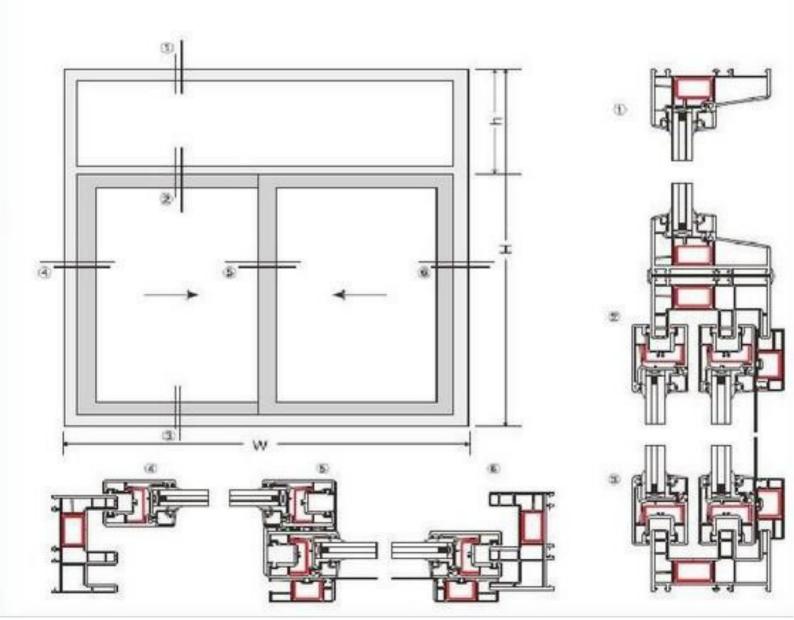






SLIDING SYSTEM-80SERIES							
SL.NC	NAME &DETAILS	CODENO	SECTIONALVIEW	REINFORCEM	ENTWEIGH M	T/PACK ETERQT	LENGTH Y(MTRS)
1	60 Double sliding	60LGKB	46 46 13 13 26 50		5.004	6	5.9
2	80 big sliding sash c	80TLDSC	66 18 37 18 18 50		0.80 0	6	5.9
3	80 Sliding sash C	80TLSC	37 		0.650	6	5.9
4	42 SASH-Mullion 2	42SZT2	66 34	15	0.840	4	5.9
5	80 Sliding sash cover	80FG	39 27 6.5		0.18	15	5.9
6	18 glazing bead	18YX	18		0.225	24	5.9



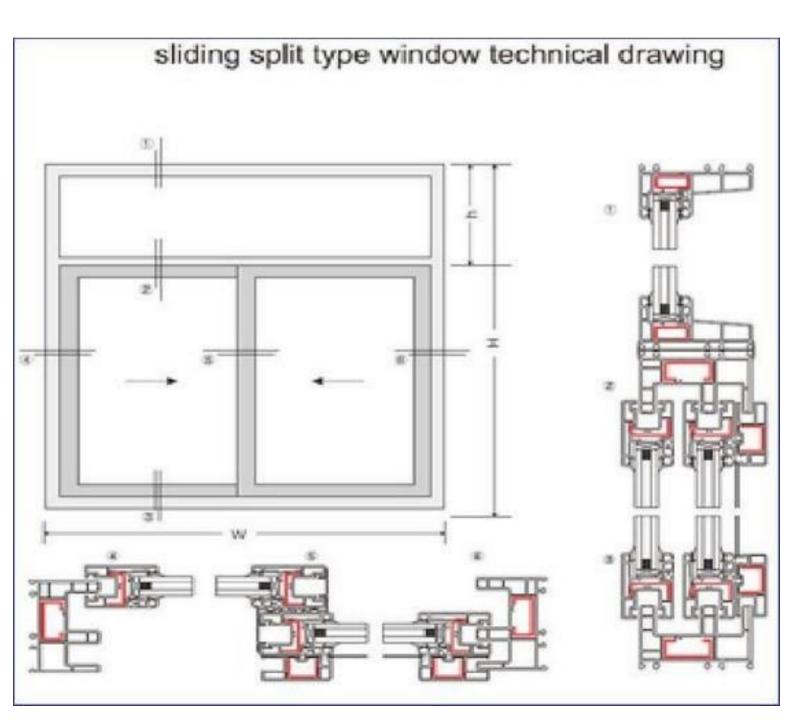











WINDOWS GALLERY

Casement windows (openout)



Securi Slide & Foldwindows



Turn/Tilt windows



Sliding window s



DOORS FOR YOUR DREAM HOME

Traditional SlidingDoor



FrenchDoors



SecuriSlide&Fold Door



CASEMENTDOOR



ResidentialDoors





Jaspal Singh



<u>+91 9001828549</u>



mail@guruupvc.com



www.guruupvc.com